




Be Right™

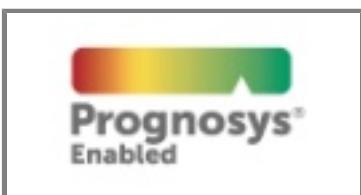

## A-ISE sc Low cost ISE Ammonium probe (immersion) with RFID, 10 m cable

Produktnr:

LXV440.99.10001

SEK Pris:

Kontakta oss

Skickas inom 1 vecka

Carries out continuously direct measurements using an ion-selective electrode. No need for reagents or sample preparation. Compensated interference by potassium. Integrated pHD reference element.

The Cartrical plus technology makes installation and cartridge replacement very easy. The code of the factory-calibrated sensor is automatically transferred to the system. This provides reliable measured values and considerably reduced maintenance time and costs in comparison with conventional ISE probes. The cartridge has a long lifetime in the application due to protected membranes.

The sensor is fully compatible with all digital SC controllers. Link2sc technology allows comparing measurement values from process and laboratory. An easy-to-hand cleaning unit is available.

Prognosys is a predictive diagnostic system that allows you to be proactive in your maintenance, by alerting you to upcoming instrument issues. Know with confidence whether changes in your measurements are due to changes in your instrument or your water.

This instrument connects to Claros, Hach's innovative Water Intelligence System, enabling you to seamlessly connect and manage instruments, data, and process – anywhere, anytime. The result is greater confidence in your data and improved efficiency in your operations. To unlock the full potential of Claros, insist on Claros Enabled instruments.

### Cost-effective trending information

The A-ISE sc sensor utilises ion selective electrode (ISE) technology to provide your plant with high level trending information while saving money by eliminating the need for reagents and sample preparation.

### Minimal maintenance with simple cartridge replacement

The sensor operates within in a Cartrical cartridge that comes factory calibrated so little maintenance is necessary. Cartridge replacement is simple: unscrew the old cartridge, plug in the new one, and the sensor is ready for measurement. Using RFID\* technology, the factory calibration is automatically identified after replacing the cartridge.

\*RFID technology available in all EU countries plus e.g. Norway, Switzerland, Serbia, Macedonia, Turkey et al. For other countries please ask your local Hach contact person.

### Simple, accurate calibration

Easy to perform, fail-safe calibration corrections compensate for naturally occurring calibration drift in ISE instruments. An advanced menu structure allows you to perform corrections without manual entry of values via Ethernet, SD card or Bluetooth.

## Specifikationer

Dataöverföring: Current output, relays and bus communication via SC controller

Dektionsgräns: 0.2 mg/L NH<sub>4</sub>-N

Flöde: < 4 m/s max.

Fuktade material: Probe: Stainless Steel 1.4571; ASA + PC, silicon; PVC and PU;

Sensor cartridge: PVC; POM; ABS; Stainless Steel 1.4571; NBR

Garanti :	24 månader
Instrumentkompatibilitet:	SC200, SC1000, SC4500. All controllers sold separately
Kabellängd:	10 m fixed cable at sensor, extendable to 100 m
Kalibreringsmetod :	With Cartrical plus technology: automatic import of factory calibration data from cartridge to probe by RFID*; 1 and 2 point matrix correction
Lagringsförhållanden:	5 - 40 °C sensor cartridge, -20 - 60 °C sensor
Längd:	320 mm
Leveransomfattning:	Ammonium probe, sensor cartridge, user manual
Mätintervall:	Continuous
Mätmetod:	Potentiometric ion-selective measurement
Mätområde:	0 - 1000 mg/L NH <sub>4</sub> -N
Monteringsvinkel:	45° ± 15° (vertical in flow direction)
Neddoppningsdjup:	0.3 - 3 m
Noggrannhet:	5% of measured value + 0.2 mg/L (with standard solutions) NH <sub>4</sub> -N
Omgivningstemperatur:	Air: -20 - 45 °C
Parameter:	NH <sub>4</sub> -N
pH-område:	5 - 9 pH
Processanslutning:	1 inch thread
Prov: tryck:	0.3 bar max.
Provtemperatur:	2 - 40°C (35.6 - 104°F)
Repeterbarhet:	±5 % of the measured value (with standard solution) NH <sub>4</sub> -N
Responstid :	< 3 min
Sensor cartridge:	With Cartrical plus technology: compact housing containing calibrated electrodes for ammonium, potassium, reference system and temperature sensor, all calibrated to each other; typical lifetime 12 months
Skyddsklass:	IP68
Vad ingår i leveransen:	Ammonium probe, sensor cartridge, user manual
Vikt :	2,4 kg

## Vad finns i förpackningen

Ammonium probe, sensor cartridge, user manual

## Obligatoriska tillbehör

- SC1000 probmodul för 4 givare, 4x 4 - 20 mA UT, relä, 110 - 240 VAC, EU-kabel (Item LXV400.99.2R121)
- SC1000 displaymodul (Item LXV402.99.00001)
- SC4500-styrenhet, Prognosys, 5x mA-utgång, 2 digitala givare, 100 - 240 VAC, utan nätsladd (Item LXV525.99A11551)
- SC4500-styrenhet, Claros-kompatibel, 5x mA-utgång, 2 digitala givare, 100 - 240 VAC, utan nätsladd (Item LXV525.99AA1551)
- SC4500-styrenhet, Claros-kompatibel, 5x mA-utgång, 2 digitala givare, 100 - 240 VAC, EU-stickkontakt (Item LXV525.99CA1551)
- SC4500-styrenhet, Prognosys, 5x mA-utgång, 1 digital givare, 100 - 240 VAC, utan nätsladd (Item LXV525.99A11501)
- SC4500-styrenhet, Prognosys, 5x mA-utgång, 1 digital givare, 100 - 240 VAC, EU-stickkontakt (Item LXV525.99C11501)
- SC4500-styrenhet, Prognosys, 5x mA-utgång, 2 digitala givare, 24 VDC, utan stickkontakt (Item LXV525.99Z11551)